

New generation
small character inkjet printers

Image 9030



030

Simply a great investment



A DOVER COMPANY

YOU MAKE IT, WE MARK IT

Imaje 9030



Printing possibilities

- Mono- or bi-jet printhead
- G head (printing resolution: 71 dpi) or M head (printing resolution: 115 dpi)
- Up to 8 lines of print
- Print speed: up to 5.5 m/s (1082 fpm)
- Font height: from 5 to 48 dots
- Character height: from 1.2 to 18.2 mm (0.04" to 0.71")
- One and two-dimensional barcodes (Datamatrix)
- Wide choice of character (Latin, Arabic, Cyrillic, Greek, Japanese, Chinese, Hebrew, Korean...)

Operations

- Message library (up to 880 messages)
- International operator/machine interface (choice of 31 languages)
- Large, WYSIWYG, backlit, blue screen
- Integrated help for navigation and diagnostics
- Creation of logos directly on the operator/machine interface
- PCMCIA and Compact Flash cards reader
- IC60 ink circuit
- Jet Speed Control guarantees marking quality
- Automatic selection of fonts, depending on print speed and printhead/object distance
- Possibility to choose ink types: quick-drying, alcohol- and water-base
- 2 sealed cartridges, 0.8 liter each (27 fl oz)
- Quick connect/disconnect of accessories (photocell, encoder, alarm)
- RS-232/422 connectivity, parallel interface, many I/O possibilities to enable remote operation

Other characteristics




- Weight: 19.5 kg (41.8 lbs)
- 3-meter flexible umbilical cable
- Stainless steel cabinet
- Dust/humidity protection rating: IP54
- No plant air required
- Operating temperature range: 0° to 40° C (32° to 104° F), depending on ink used
- Humidity: 10% to 90% non-condensing
- Electrical power supply: 100-120V or 200-240V with automatic switching; frequency 50/60 Hz; power 60 VA

Options

- IP65 (requires plant air)
- Ethernet connectivity
- Printhead pressurization kit
- U-bend or side-mounted umbilical cable

Accessories

- Printer stand (stainless steel or aluminum)
- Printhead stand (stainless steel)
- Different printhead brackets
- Printhead cover
- Photocell
- Encoder
- Alarm beacon (24V)

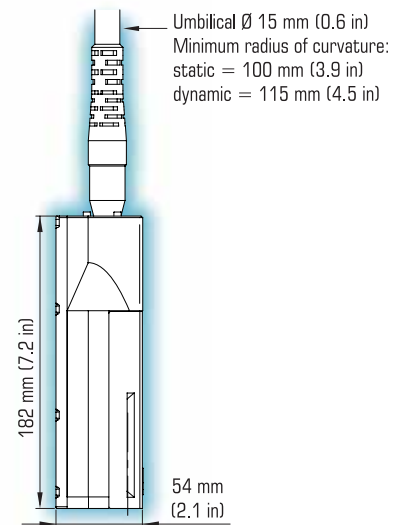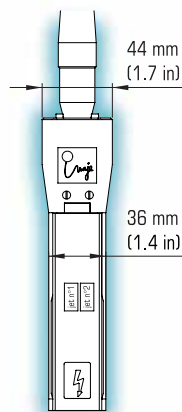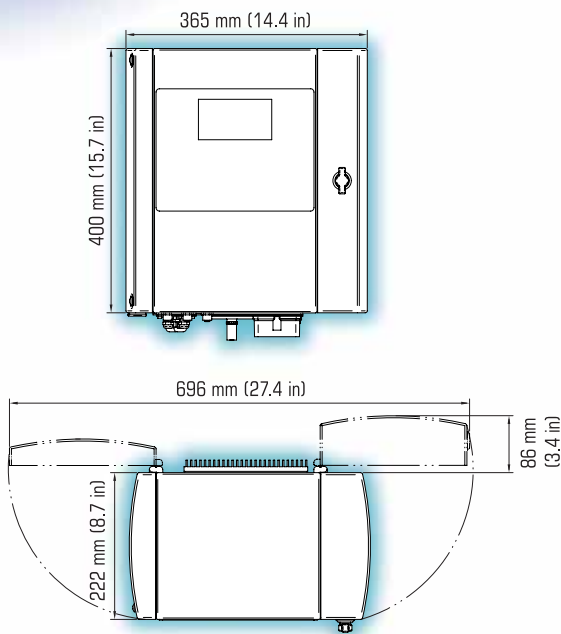

We reserve the right to amend the design and/or specifications of our products without notice.

Imaje S.A.

Head office,
9, rue Gaspard Monge,
BP 110,
26501 Bourg-lès-Valence Cedex
France
Tel.: (33) 4 75 75 55 00
Fax: (33) 4 75 82 98 10
<http://www.imaje.com>



A DOVER COMPANY

YOU MAKE IT, WE MARK IT